

XLOTM
PRODUCT
CATALOG



UltraPLUS™

XLO™ UltraPLUS™ cables are the latest, most advanced versions of the popular Ultra™ Series. UltraPLUS is manufactured with classic XLO Integrated Field-Balanced Surface/Diving Winding Geometry™ so topologically speaking the cable has no surface or center and frequency-related phase shift is effectively canceled. Very low capacitance and inductance means XLO UltraPLUS cables work with a wide variety of components. The sound is clear and neutral with tight, powerful bass and an engaging midrange with clean and extended highs, hallmark XLO sound.



Single-Ended Audio Cable RCA Stereo Pair

Field-Balanced Surface/Diving Winding Geometry™

PC-OCC single-filament solid-core monocrystal copper conductors

Aerospace-grade PTFE insulation

Low-capacitance hand-terminated 24K mil-spec direct gold-plated RCA connectors

Cable identification ring

Item Code	Lengths
UP1A-0.5M	0.5m – 1.64ft
UP1A-1M	1.0m – 3.28ft
UP1A-2M	2.0m – 6.56ft
UP1A-3M	3.0m – 9.84ft
UP1A-4M	4.0m – 13.12ft
UP1A-5M	5.0m – 16.40ft
UP1A-6M	6.0m – 19.68ft

Custom lengths available at additional cost



Balanced Audio Cable XLR Stereo Pair

Field-Balanced Surface/Diving Winding Geometry™

PC-OCC single-filament solid-core monocrystal copper conductors

Aerospace-grade PTFE insulation

Low-capacitance hand-terminated 24K mil-spec direct gold-plated XLR connector pins

Cable identification ring

Pin-2 positive, pin-3 negative on request

Item Code	Lengths
UP2A-0.5M	0.5m – 1.64ft
UP2A-1M	1.0m – 3.28ft
UP2A-2M	2.0m – 6.56ft
UP2A-3M	3.0m – 9.84ft
UP2A-4M	4.0m – 13.12ft
UP2A-5M	5.0m – 16.40ft
UP2A-6M	6.0m – 19.68ft

Custom lengths available at additional cost



UltraPLUS™ Phono Cable keeps interference at bay with a Full-Floating Faraday cage and external shield clips. On the digital side **UltraPLUS USB** cable is fabricated with quality materials and top build quality especially connector integrity where most inexpensive USB cables fail. XLO'S high-performance UltraPLUS USB cable is as over-engineered and over-built as the rest of our cable lines.



Shielded Phono Cable

RCA Stereo Pair

Field-Balanced Surface/
Diving Winding Geometry™

PC-OCC single-filament
solid-core monocrystal
copper conductors

Aerospace-grade PTFE
insulation

Low-capacitance hand-
terminated 24K mil-spec
direct gold-plated RCA
connectors

Full-Floating Faraday Cage
shielding

DIN or SME right-angle
connectors available at
additional cost

Item Code	Lengths
UP3A-1M	1.0m – 3.28ft
UP3A-2M	2.0m – 6.56ft
UP3A-3M	3.0m – 9.84ft


Custom lengths available at additional cost

Additional Termination Options:
Straight DIN-to-RCA, RCA-to-XLR, Straight DIN-to-XLR



Silver-plated PC-OCC
copper conductors

Premium-grade solid-HDPE
dielectric insulation

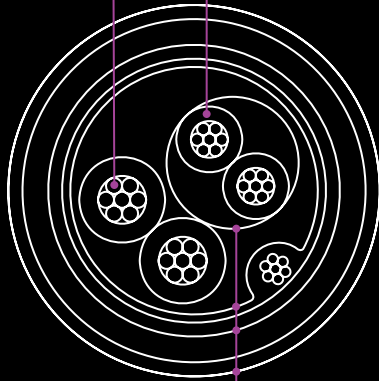

Triple-layer shielded
design



USB Digital Datalink

Type A-to-B

XLO-engineered USB-
certified Type A-to-B USB
2.0 terminations

24K mil-spec gold-plated
contacts and silver-plated
PC-OCC copper conductors

Premium-grade solid-HDPE
dielectric insulation keeps
cable geometry stable and
three-layer shielding lowers
noise

Item Code	Lengths
UP4U-1.0M	0.5m – 1.64ft
UP4U-1.5M	1.0m – 3.28ft
UP4U-2.0M	2.0m – 6.56ft
UP4U-3.0M	3.0m – 9.84ft
UP4U-5.0M	4.0m – 13.12ft





Digital Cable RCA Termination

Field-Balanced Surface/Diving Winding Geometry™

PC-OCC single-filament solid-core monocrystal copper conductors

Aerospace-grade PTFE insulation

Low-capacitance hand-terminated 24K mil-spec direct gold-plated RCA connectors

Cable identification ring

Item Code	Lengths
UP4A-0.5M	0.5m – 1.64ft
UP4A-1M	1.0m – 3.28ft
UP4A-2M	2.0m – 6.56ft
UP4A-3M	3.0m – 9.84ft
UP4A-4M	4.0m – 13.12ft
UP4A-5M	5.0m – 16.40ft

Custom lengths available at additional cost



AES/EBU Digital Cable XLR Termination

Field-Balanced Surface/Diving Winding Geometry™

PC-OCC single-filament solid-core monocrystal copper conductors

Aerospace-grade PTFE insulation


Low-capacitance hand-terminated 24K mil-spec direct gold-plated XLR connector pins

Cable identification ring

Item Code	Lengths
UP4B-0.5M	0.5m – 1.64ft
UP4B-1M	1.0m – 3.28ft
UP4B-2M	2.0m – 6.56ft
UP4B-3M	3.0m – 9.84ft
UP4B-4M	4.0m – 13.12ft
UP4B-5M	5.0m – 16.40ft

Custom lengths available at additional cost

UltraPLUS Coax and AES/EBU Digital Cables are expertly engineered to avoid signal reflections within the cables with all-important impedance-matched connectors. UltraPLUS digital cables deliver exceptionally neutral sound, tight, powerful bass, and an engaging midrange with clean and extended highs. Hear more deeply and feel more connected to music than ever before!

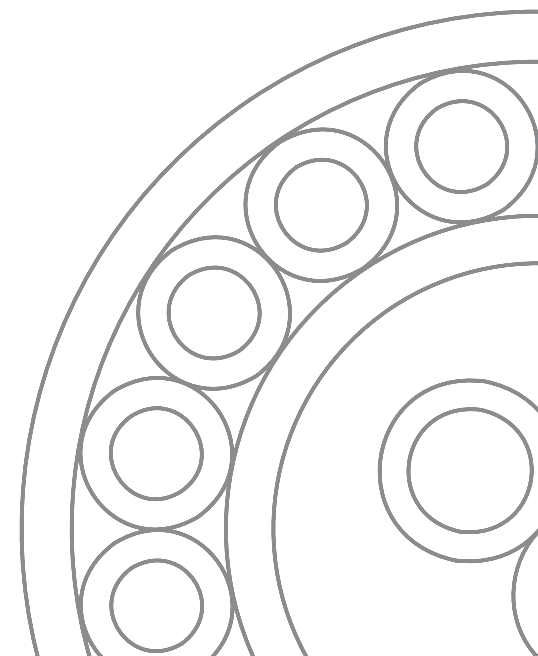



AC Power Cable

Protected by U.S. Patent
Number 5,110,999

Field-Balanced Surface/
Diving Winding Geometry™

PC-OCC dual-gauge
monocrystal copper
conductors

Terminated with 15A/125
VAC NEMA-style and IEC
connector

Available with NEMA,
Schuko, UK, AU or Swiss
plug and 15A or 20A IEC
connector

Item Code	Lengths
U10-3	3ft – 0.91m
U10-6	6ft – 1.83m
U10-9	9ft – 2.74m
U10-12	12ft – 3.66m

Custom lengths available at additional cost

Termination
Options



NEMA



SCHUKO



UK



SWISS




AUS/NZ



20A IEC



15A IEC

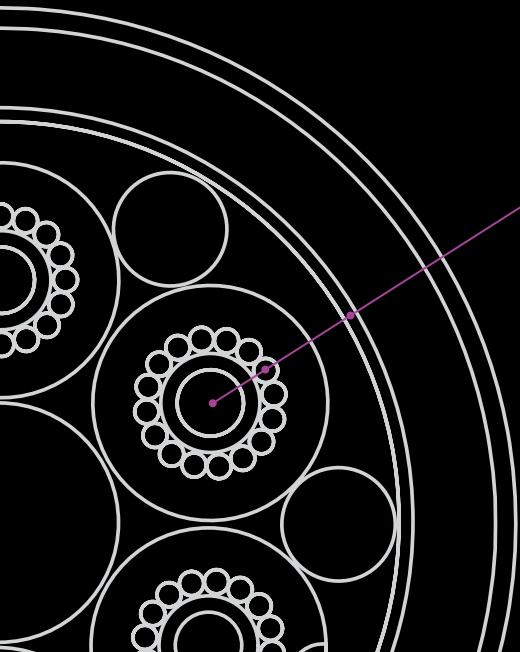

UltraPLUS AC Power Cords
with patented dual-gauge
design optimizes power
transfer eliminating noise
on the AC line above 60Hz.

Effective shielding and **Field-
Balanced Winding Geometry™**
result in a quieter, more
natural, less forward and
bright sonic presentation with
far better-defined power in
the bass.



Speaker Cable


Stereo Pair

Field-Balanced Surface/
Diving Winding
Geometry™

2-conductor 10+ AWG
PC-OCC monocrystal
solid-core copper
conductors

Aerospace-grade PTFE
insulation

Low-capacitance hand-
terminated 24K mil-spec
direct gold-plated 6.0 mm
or 8.0 mm copper spades
or bananas



Item Code	Lengths
U6-6	6ft – 1.83m
U6-8	8ft – 2.44m
U6-10	10ft – 3.05m
U6-12	12ft – 3.66m
U6-15	15ft – 4.57m

Item Code	Lengths
U6-125	6ft – 1.83m
U6-250	8ft – 2.44m

Custom lengths available at additional cost

**Heat shrink tubing kit included with bulk spools*



Shotgun Speaker Cable


Four Conductor/Four Terminations

Field-Balanced Surface/
Diving Winding
Geometry™

4-conductor 8+ AWG
PC-OCC monocrystal
solid-core copper
conductors

Aerospace-grade PTFE
insulation

Low-capacitance hand-
terminated 24K mil-spec
direct gold-plated 6.0 mm
or 8.0 mm copper spades
or bananas




Item Code	Lengths
U12SG-6	6ft – 1.83m
U12SG-8	8ft – 2.44m
U12SG-10	10ft – 3.05m
U12SG-12	12ft – 3.66m
U12SG-15	15ft – 4.57m

Item Code	Lengths
U12-125	6ft – 1.83m
U12-250	8ft – 2.44m

Custom lengths available at additional cost

**Heat shrink tubing kit included with bulk spools*





Bi-Wire Speaker Cable


Four Conductor/Six Terminations

Field-Balanced Surface/
Diving Winding
Geometry™

4-Conductor, 8+ AWG
PC-OCC mono-crystal,
solid-core copper
conductors

Aerospace-Grade PTFE
insulation

Low-capacitance hand-
terminated 24K mil-spec
direct gold-plated 6.0 mm
or 8.0 mm copper spades
or bananas



Item Code	Lengths
U12BW-6	6ft – 1.83m
U12BW-8	8ft – 2.44m
U12BW-10	10ft – 3.05m
U12BW-12	12ft – 3.66m
U12BW-15	15ft – 4.57m

Item Code	Lengths
U6-125	6ft – 1.83m
U6-250	8ft – 2.44m

Custom lengths available at additional cost

**Heat shrink tubing kit included with bulk spools*



Bi-Wire Jumper Cable Set


Set of Four

Field-Balanced Surface/
Diving Winding
Geometry™

10+ AWG PC-OCC
monocrystal solid-core
copper conductors


Aerospace-grade PTFE
insulation

Low-capacitance hand-
terminated 24K mil-spec
direct gold-plated 6.0 mm
or 8.0 mm copper spades
or bananas



Item Code	Description
U-J/S	6" Jumper Cable Set

Additional lengths are available at extra charge

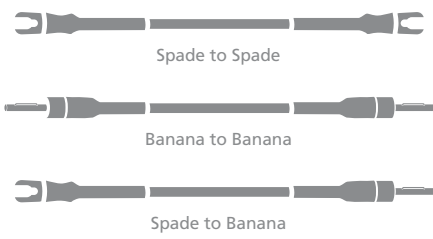



www.xloelectric.com

©2013 Ultralink/XLO Products, Inc. All rights reserved.